


SURF LIGHTING INC.

210 WEST 24 ST. HIALEAH, FL. 33010 TEL: (305) 888-7851 FAX. (305) 883-8611

UC LED

DIMENSIONS

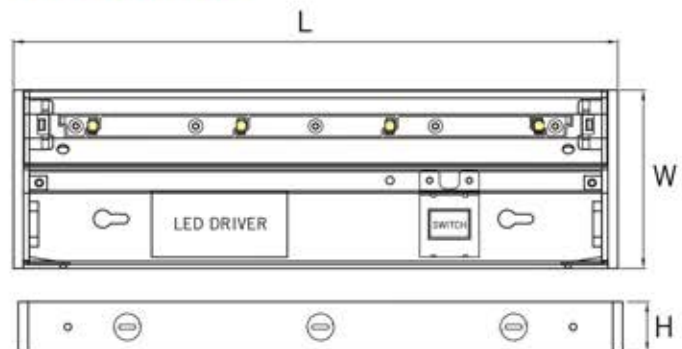

| MODEL | FIXTURE SIZE | | | NO. OF LED | WATTAGE | TOTAL LUMENS | EFFICACY |
|-----------|--------------|-------|--------|------------|---------|--------------|----------|
| | LENGTH | WIDTH | HEIGHT | | | | |
| UC-LED-12 | 12" | 3.5" | 1" | 4 | 4W | 320 | 80 lm/W |
| UC-LED-18 | 18" | 3.5" | 1" | 6 | 6W | 480 | 80 lm/W |
| UC-LED-24 | 24" | 3.5" | 1" | 8 | 8W | 640 | 80 lm/W |

LEDs:

- Manufacturer: Nichia (757 Series)
- Rated Life: 50,000 hours
- Power: 1 Watt/LED
- Color Temp: 3000K, Warm White, Comparable to Halogen

DRIVER:

- Manufacturer: Keystone Technologies
- PN: KTLD-12-1-380-FDIM-AF1
- 120 Volt Input
- 12 Watt Max, Constant Current @ 380 mA
- UL 1310 Class 2 Power Supply
- Type 1 Outdoor, Suitable for Dry and Damp Location

HOUSING AND CONSTRUCTION:

- Extruded Aluminum
- Standard Finish: Premium Powder Coated in White
- Sleek 1" Profile
- Lens: Tempered Glass with Micro-Prismatic Texture

DIMMING:

- Phase Control Dimming
- Suitable for Use with TRIAC Dimmers

WIRING AND SWITCHING:

- Convertible 120V input with either Direct Wire or Cord and Plug; Knockouts provided for either configuration
- Linkable between fixtures using linking connector cords (when spacing between fixtures is desired) or double-ended connectors (for continuous fixture mounting); Maximum number of linked fixtures is 32
- Pre-Installed On/Off Rocker Switch

PACKAGING:

- Contents in Each Fixture Carton:
 - LED Fixture
 - 3 Prong SPT-2 Power Cord (5' Length)
 - 18" Linking Connector Cord
 - Mounting Screws (2 pcs.)
 - Die Cast Coupler
 - Instruction Sheet

WARRANTY:

- Fixture Construction: 2 years
- Driver: 5 years
- LEDs: 5 years